

TRIPLE ROPE EXTENSION LADDER FOR FIRE AND RESCUE SERVICES COMPLIANT WITH EN 1147



THE + PYROS

- Anti-slip grooved D-shaped rungs
- Innovative patented screw assembly enables rungs and stiles to be replaced
- High-strength round edge aluminium profile for excellent grip and handhold
- Extruded aluminium rung lock system
- Interchangeable anti-slip self-draining rubber ladder feet
- Hydrophobic rope Ø10 mm and Ø14 mm with a minimum breaking strength of 2,600 daN
- Multi-directional telescopic ladder legs adjustable individually with locking bolt

MODELS AVAILABLE

- 4 models available: 8.3/11 / 12 m / 14.5 m
- Stabiliser/leveller for uneven ground




Find all our products on www.audinnov.fr

AUDINNOV - 3 ZA du Pasquier - 71800 Varennes-sous-Dun
FRANCE - Tél. : +33 (0)3 85 28 01 41 - contact@audinnov.fr

audinnov®
SAFETY FIRST

Because we care!

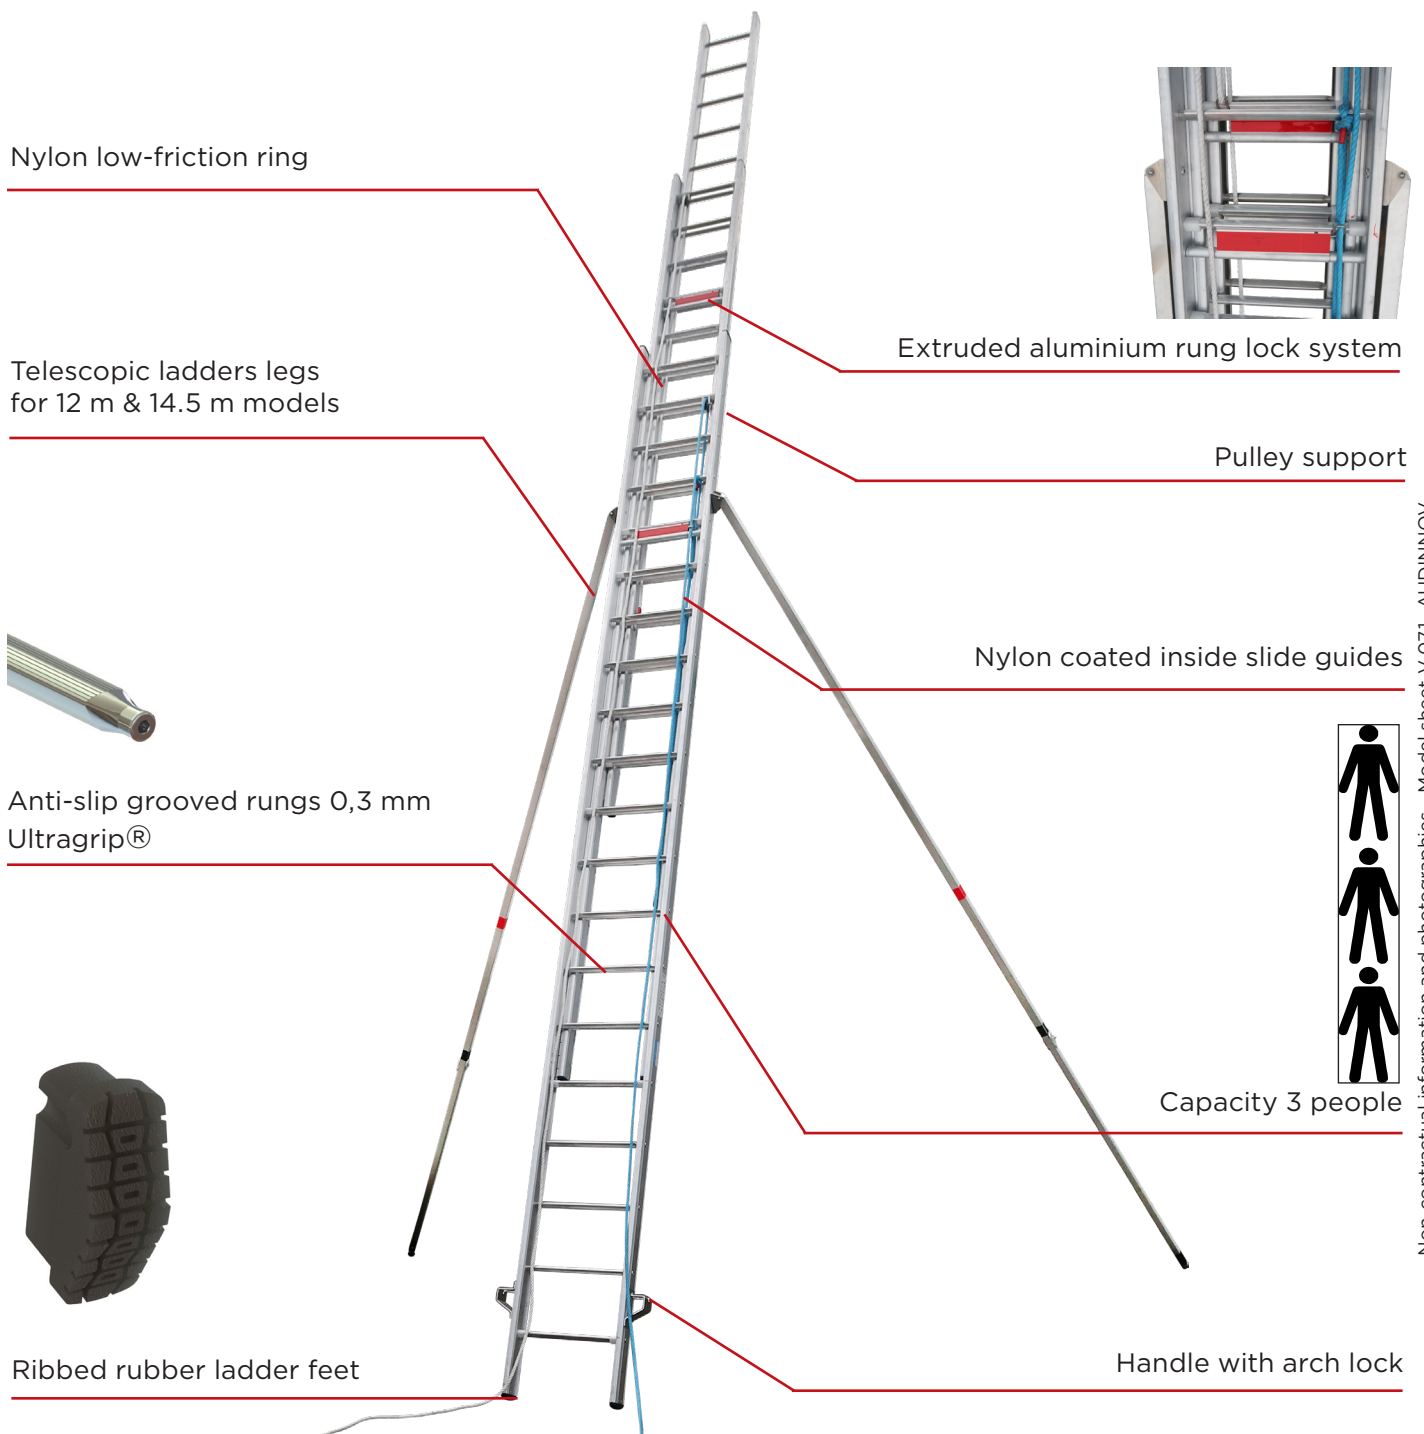

Non-contractual information and photographs - Model sheet V 071- AUDINNOV

Product Code	Length folded	Length extended	Weight	Number of rungs	Outer width Section 1-2-3	Inner width Section 1-2-3	Number of rung locks
103105	3.5 m	8.10 m	42 kg	3x13	528-447-380 mm	468-387-320 mm	2
103106	4.5 m	11 m	55 kg	3x14	510-445 -320 mm	450-385 -320 mm	2
103107	5.1 m	12.7 m	76 kg	3x16	510-445 -320 mm	450-385 -320 mm	2
103108	5.7 m	14.5 m	85 kg	3x18	510-445 -320 mm	450-385 -320 mm	2